

# 产品世界 Products World

品质体现我们的尊严，出类拔萃的品质拒绝平庸。标准化的质量管理体系和系统化的品质保证体系让隋塔产品行销世界的每个角落。

Quality express our dignity, Excellent quality refuse bourgeois. Standard Quality Management System assures SUITA products to be sold all over the world

	Polypro-pylene 聚丙烯 (PP)	Polyamide 锦纶 (PA)	Polyester 聚脂 / 涤纶 (PET)	Pyton® PPS 聚苯硫醚 (PPS)	Nomex® Aromatic Aramid 偏芳族聚 酰胺 (Aramid)	P-84™ Polyimide 聚酰亚胺 (P-84)	Faiberglass 玻璃纤维 (GL)	PTFE 聚四氟乙 烯 (PTFE)
连续运行温度℃ Operating Temperature	< 90	< 130	< 130	< 190	< 204	< 240	< 260	< 260
瞬间温度℃, 干热状态 Maximum Temperature	< 100	< 150	< 150	< 200	< 220	< 260	< 280	< 280
耐磨性 Wearness Resistance	好 Good	一般 Fair	差 Weak	好 Good	好 Good	好 Good	一般 Fair	极佳 Excellent
耐湿热性 Wetness Resistance	极佳 Excellent	极佳 Excellent	极佳 Excellent	极佳 Excellent	极佳 Excellent	极佳 Excellent	一般 Fair	一般 Fair
耐水解性 Hydrolysis	好 Good	极佳 Excellent	极佳 Excellent	极佳 Excellent	一般 Fair	一般 Fair	极佳 Excellent	极佳 Excellent
耐碱性 Alkaline Resistance	极佳 Excellent	好 Good	一般 Fair	极佳 Excellent	好 Good	一般 Fair	一般 Fair	极佳 Excellent
耐有机酸 Acidic Resistance	极佳 Excellent	一般 Fair	好 Good	极佳 Excellent	一般 Fair	极佳 Excellent	极佳 Excellent	极佳 Excellent
抗氧化性 Anti-oxidability	好 Good	一般 Fair	好 Good	差 Weak	一般 Fair	极佳 Excellent	极佳 Excellent	极佳 Excellent



### 单丝

纤维表面光洁，易清灰、剥离  
**Monofilament**  
the surface of the fiber is glabrous, easy for separate




### 长纤维复丝

多股单纤维并合，强度高，剥离性能较好  
**Multifilament**  
combined many filament, high strength, easy for separate




### 短纤维

多股短纤维捻合，捕集性能好，剥离性能稍差  
**Staple fiber**  
combined by many staple and not very easy for separate




### 平纹

组织点细密、织物强力高、对细微粒子的捕集能力好  
**Plain weave**  
joint point is close, fabrics has high strength

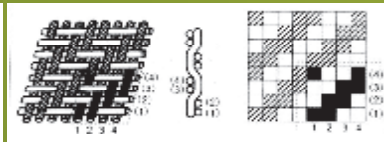

### 斜纹

组织点中等，利于织物加密和增加强力、剥离性能较差  
**Twill weave**  
joint point is not very close, easy for make the fabrics more density

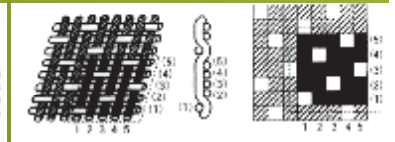

### 缎纹

组织点少，有利于提高织物密度，表面光洁，易清灰、剥离  
**Satin weave**  
few joint point, easy for making the surface of the fabric more glabrous

# 丙纶纤维系列过滤布 Polypropylene Filter Fabrics Series



本系列产品采用丙纶纤维织造，材质代号 PP，分为短纤、长丝和单丝三类。产品具有丙纶纤维特性，耐酸，耐碱，比重轻，熔化点 142-146℃，正常使用温度为 <90℃。

产品主要用于精细化工、染料化工、其他化工业，制糖、制药、氧化铝等行业碱性较强的固液分离的板框压滤机、带式过滤机、折带式过滤机、盘式过滤机、转鼓式过滤机等设备配套之中。产品的过滤精度最小可达 1 微米以下。


Polypropylene Fabrics Series, which are made of polypropylene fiber (PP), can be divided into PP staple fabrics, PP long thread fabrics, and PP monofilament fabrics. These products possess the properties of acid-resistance, alkali-resistance, small specific gravity, the melting point 142-146℃, and operating temperature maximum 90℃.

They are mainly used in precision chemical, dye chemical, sugar, Pharmaceutical, alumina industry, for the equipments of frame filter presses, belt filters, blend belt filters, disc filters, drum filters etc. The filter precision can reach less than 1 micron.

类别 Series	品号 Model No.	经纬密度 (根/10cm) Density (warp/weft) (counts/10cm)	克重 (g/m) Weight (gram/m <sup>2</sup> )	经纬断裂强度 (warp/weft) Bursting Strength (N/5×20cm)	透气量 Air permeability (L/m <sup>2</sup> .s)	织物组织 Construction
丙纶短纤维系列 Polypropylene staple fiber series	2402	236/118	530	4800/2300	110	T
	4212	236/114	390	3500/2100	170	T
	6438	252/150	420	3600/1600	125	S
	2115	220/150	330	3100/1500	210	S
	2316	232/60	400	3050/600	120	S
	1140	433/157	425	3200/1200	40-50	S/ 拉毛
	4131	161/122	315	1550/1100	30-40	P/ 拉毛
	1107	105/50	360	/	800	O
丙纶网络丝系列	0400	40/32	310	/	1300	P
	5000	43/41	495	/	850	P
	3018	114/71	450	/	750	O

\* 注：平纹：Plain (P) 斜纹：Twill (T) 缎纹：Satin (S) 其它：Other (O)  
上述技术数据，仅供参考，可调整，以约定为准

## 丙纶纤维系列过滤布 Polypropylene Filter Fabrics Series

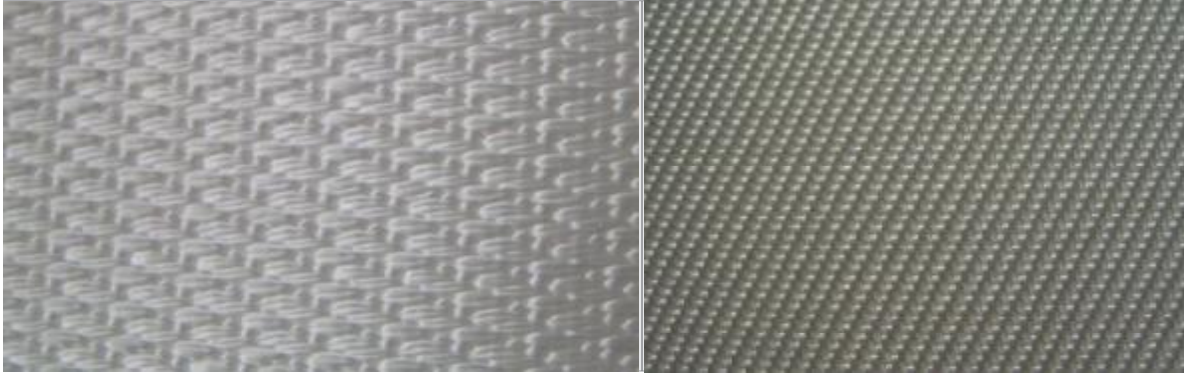

本系列产品采用丙纶纤维织造，材质代号PP，分为短纤、长丝和单丝三类。产品具有丙纶纤维特性，耐酸，耐碱，比重轻，熔点142-146，正常使用温度为<90℃。

产品主要用于精细化工、染料化工、其他化工业，制糖、制药、氧化铝等行业碱性较强的固液分离的板框压滤机、带式过滤机、折带式过滤机、盘式过滤机、转鼓式过滤机等设备配套之中。产品的过滤精度最小可达1微米以下。

Polypropylene Fabrics Series, which are made of polypropylene fiber (PP), can be divided into PP staple fabrics, PP long thread fabrics, and PP monofilament fabrics. These products possess the properties of acid-resistance, alkali-resistance, small specific gravity, the melting point 142-146, and operating temperature maximum 90.

They are mainly used in precision chemical, dye chemical, sugar, Pharmaceutical, alumina industry, for the equipments of frame filter presses, belt filters, blend belt filters, disc filters, drum filters etc. The filter precision can reach less than 1 micron.

类别 Series	品号 Model No.	经纬密度 (根/10cm) Density(warp/weft) (counts/10cm)	克重 (g/m <sup>2</sup> ) Weight (gram/m <sup>2</sup> )	经纬断裂强度 Bursting Strength (warp/weft) (N/5×20cm)	透气量 Air permeability (L/m <sup>2</sup> .s)	织物组织 Construction
	A2436	189 / 114	340	3350 / 3000	75	P
	B6840	268 / 157	495	4500 / 3800	20	P
	B7433	291 / 130	475	5000 / 2300	80	T
	B6433	252 / 130	440	4500 / 2300	95	T
	B6232	244 / 126	410	4350 / 2250	110	T
	B6030	236 / 118	395	4250 / 2100	130	T
	B7128	279 / 110	465	4500 / 1800	80	T
	7640	301 / 157	8400	5000 / 2400	20	T
	3411	338 / 110	490	4500 / 1700	28	O
	5422	535 / 220	570	5000 / 1650	25	O
	2425	185 / 126	405	3450 / 2400	45	O
	2483	660 / 134	580	4800 / 1450	40	T
	PP9A	510 / 205	240	2300 / 850	220	T
	1362	295 / 122	470	5000 / 2050	80	T
	1342	146 / 98	320	3100 / 2000	70	P
	1384	338 / 138	500	4800 / 2400	35	O
	3720	146 / 78	830	5000 / 4100	40	O
	9366	366 / 228	490	4800 / 1300	20	T
	AB8446	330 / 181	535	5000 / 3000	110	O
	AB7840	307 / 160	490	5000 / 2650	180	O
	AB9963	389 / 248	690	>5000 / 3500	10-20	O
	1058	413 / 228	590	5000 / 3100	75	O
	6320	582 / 196	500	5000 / 4100	75	O
	521	211 / 151	300	2300 / 1850	70	T
	522	228 / 189	150	1200 / 950	150	P
	527	230 / 180	220	1750 / 1400	120	P
	534	193 / 102	365	2450 / 1600	40	P
	3127	539 / 228	240	2950 / 1250	700	O
	3128	598 / 240	280	3200 / 1500	620	S
	W3936	154 / 142	240	3200 / 2500	/	O
	8283	322 / 142	620	4800 / 1600	15-20	O
	8626	338 / 102	1000	>5000 / 1200	/	T
	12028	472 / 110	720	>5000 / 1200	15-20	O
	10828	425 / 110	640	>5000 / 1200	20-30	O
	8628	378 / 110	535	7500 / 2500	40-50	O
	8028	346 / 110	580	4600 / 1800	30-40	O


丙纶长纤维系列  
Polypropylene long thread series

\* 注：平纹：Plain (P) 斜纹：Twill (T) 缎纹：Satin (S) 其它：Other (O)  
上述技术数据，仅供参考，可调整，以约定为准

Tel:+86 13216485652 Fax:+86 576 83665299 Email:info@suitafiltech.com website:www.suitafiltech.com

INDUSTRIAL CLOTH FACTORY 13

# 丙纶纤维系列过滤布 Polypropylene Filter Fabrics Series

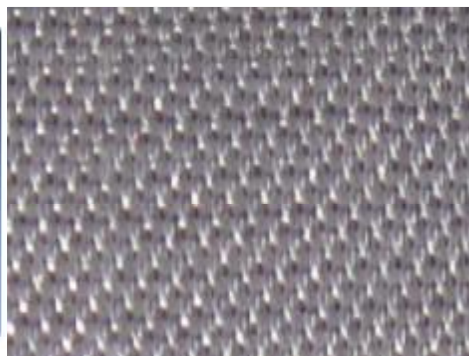

本系列产品采用丙纶纤维织造，材质代号 PP，分为短纤、长丝和单丝三类。产品具有丙纶纤维特性，耐酸，耐碱，比重轻，熔点 142-146，正常使用温度为 <90。

产品主要用于精细化工、染料化工、其他化工业，制糖、制药、氧化铝等行业碱性较强的固液分离的板框压滤机、带式过滤机、折带式过滤机、盘式过滤机、转鼓式过滤机等设备配套之中。产品的过滤精度最小可达 1 微米以下。

Polypropylene Fabrics Series, which are made of polypropylene fiber (PP), can be divided into PP staple fabrics, PP long thread fabrics, and PP monofilament fabrics. These products possess the properties of acid-resistance, alkali-resistance, small specific gravity, the melting point 142-146, and operating temperature maximum 90.

They are mainly used in precision chemical, dye chemical, sugar, Pharmaceutical, alumina industry, for the equipments of frame filter presses, belt filters, blend belt filters, disc filters, drum filters etc. The filter precision can reach less than 1 micron.

类别 Series	品号 Model No.	经纬密度 (根/10cm) Density (warp/weft) (counts/10cm)	克重 (g/m) Weight (gram/m <sup>2</sup> )	经纬断裂强度 Bursting Strength (warp/weft) (N/5×20cm)	透气量 Air permeability (L/m <sup>2</sup> .s)	织物组织 Construction
丙纶单丝系列 Polypropylene monofilament series	3127	539 / 228	240	2950 / 1250	700	0
	3128	598 / 240	280	3200 / 1500	620	S
	3130	472 / 220	250	2550 / 1250	560	T
	5514	622 / 146	400	3100 / 2500	320	0
	5032	196 / 126	116	1100 / 750	/	0
	4240	165 / 157	240	1700 / 1600	2200	T
	6336	248 / 142	275	2450 / 1400	/	T
	3618	360 / 181	305	2700 / 1500	1200	T
	5822	1210 / 488	195	3100 / 1500	150	0
	2812	283 / 118	276	2200 / 1450	/	T
	6022	630 / 214	326	3250 / 2350	110	S
	5019	504 / 189	220	2850 / 1100	580	0
	5744	1134 / 440	310	4500 / 2200	90	0
	5722	1140 / 445	280	4250 / 2000	110	0
	3228	318 / 244	190	1600 / 1350	3200	0
	4217	422 / 169	310	2500 / 1200	/	S
	7228	716 / 283	255	2500 / 1600	750	S
	5025	196 / 98	210	2800 / 1200	1250	S
	12870-A	625 / 284	340	3500 / 1800	170	0
	12870-B	625 / 284	365	3500 / 2100	150	0
	12870-C	625 / 216	480	3500 / 2700	110	0
	9026	500 / 110	265	2800 / 1450	180	T
	2812H	284 / 118	285	2100 / 1250	2200	T
	5321	532 / 212	240	3100 / 1250	60	T
	5235	204 / 138	400	2800 / 1550	1200	T
	1382	425 / 169	290	3150 / 1400	150	S
	2021	1180 / 420	300	4200 / 1350	120	S
	2025	374 / 188	280	2750 / 1400	180	S
	5814	1365 / 142	310	3800 / 1100	80	T
	3138	520 / 169	245	3150 / 1100	120	T
9676	276 / 71	425	3600 / 1100	2500	T	
4518	453 / 161	335	3350 / 1400	120	S	
5788	1134 / 354	480	4200 / 2300	100	0	
5020	582 / 134	430	4600 / 2200	550	S	
2023	346 / 165	340	3700 / 1600	600	T	
4238	165 / 150	200	2200 / 1500	1200	T	

\*注: 平纹: Plain (P) 斜纹: Twill (T) 缎纹: Satin (S) 其它: Other (O)  
上述技术数据, 仅供参考, 可调整, 以约定为准